



INTRODUCTION

Robust and high durability under extreme conditions.
From 2 to 200km/h wind speed.
High quality stainless steel bearings.
Maintenance free.

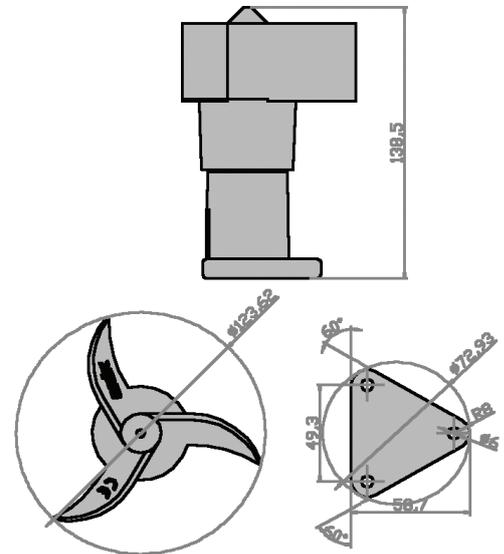

TECHNICAL SPECIFICATIONS

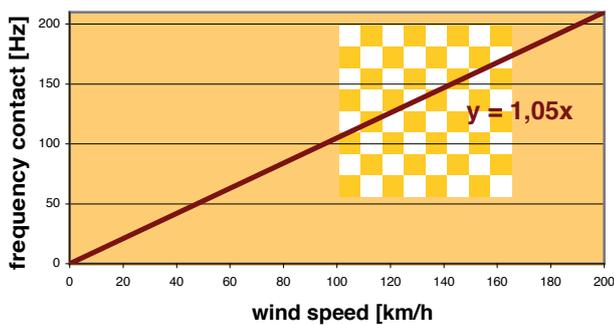

Wind Speed - Output Relation

Output frequency is proportional to wind speed. Wind speed = 0Km/h Output Anemo4403 = 0 Hz. Wind speed = 100Km/h Output Anemo4403 = 105 Hz

Operation temp (free ice) = -20°C + 80°C

Weight (without cable) = 200gr approx.

Accuracy +-2%